

SR550™ LED Chips

CxxxSR550-Sxx00-xx

PRODUCT DESCRIPTION


Cree LED's SR LED Chips are the newest generation of solid-state LED emitters that combine highly efficient InGaN materials with Cree LED's device design to deliver superior value and performance. SR LED Chips are among the smallest and brightest in the market enabling compact and highly efficient solutions for a variety of applications, including indicators, gaming, and video displays. SR550 LED Chips are designed for use in industry standard single color, RGB and white-converted packaging with silicone die attach and standard wire bonding.

FEATURES

- RF Performance @ 80 mA:
 - 450 nm – 130+ mW
 - 460 nm – 120+ mW
 - 470 nm – 100+ mW
 - 527 nm – 55+ mW
- Low Forward Voltage
 - 2.95 V typical @ 80 mA
- For use with Clear Adhesive Die Attach
- 67 μm Bonding Area (both Bond Pads)
- Distributed Bragg Reflector (DBR)
- 200 μm Chip Thickness
- 2 kV, Class 2 ESD Rating

APPLICATIONS

- Indicators
 - Single color Blue
 - Multi-color (RGB)
 - White-converted
- White Goods (Appliances)
- Gaming Systems
- Backlight Units (BLU)
- Consumer Electronics
- General Lighting
- Automotive Lighting
 - Interior Lighting
 - Backlight Units (BLU)

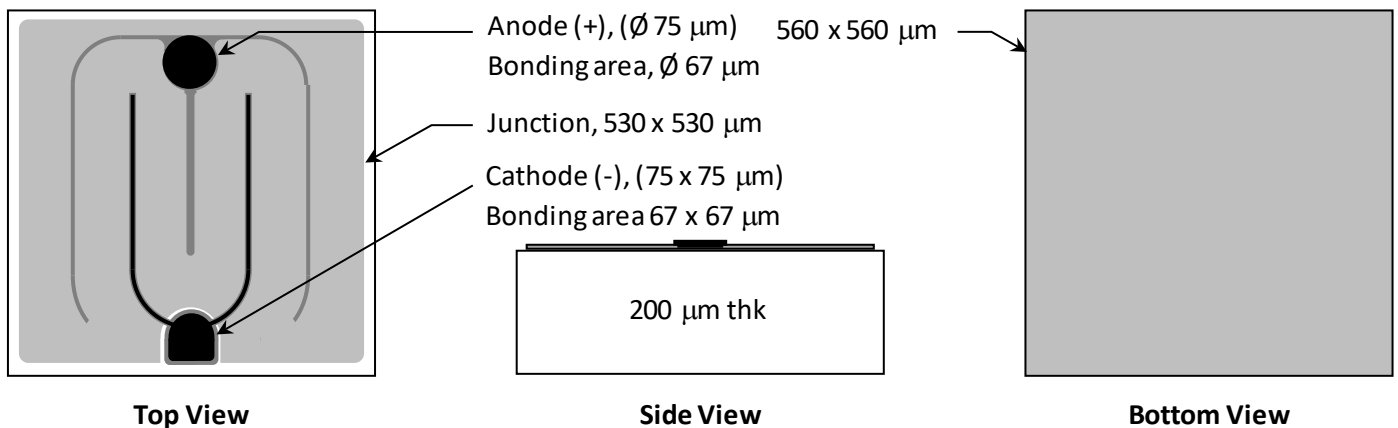

Cree LED / 4400 Silicon Drive / Durham, NC 27703 USA / +1.919.313.5330 / www.cree-led.com

MECHANICAL SPECIFICATIONS

| Description | Dimensions | Tolerance |
|---|------------|-----------|
| P-N Junction Area (μm) | 530 x 530 | ± 25 |
| Bond Pad Center-to-Center (μm) - reference only | (415) | - |
| Chip Top Area (μm) | 560 x 560 | ± 25 |
| Chip Thickness (μm) | 200 | ± 15 |
| Chip Bottom Area (μm) | 560 x 560 | ± 25 |
| Au Bond Pad Diameter - Anode (μm) - reference only | (75) | - |
| Bonding Area Diameter - Anode (μm) ^{Note 4} | 67 | ± 10 |
| Au Bond Pad Area - Cathode (μm) - reference only | (75 X 75) | - |
| Bonding Area Diameter - Cathode (μm) ^{Note 4} | 67 x 67 | ± 10 |
| Au Bond Pad Thicknesses (μm) - reference only | (2.0) | - |


MAXIMUM RATINGS & TYPICAL CHARACTERISTICS

| Maximum Ratings at $T_A = 25^\circ\text{C}$ ^{Note 1} | CxxxSR550-Sxx00-xx |
|---|--|
| DC Forward Current | 200 mA |
| Peak Forward Current (10% Duty Cycle @ 1 kHz) | 260 mA |
| LED Junction Temperature | 150°C |
| Reverse Voltage ^{Note 6} | 7 V |
| Operating Temperature Range | -40°C to +110°C |
| LED Chip Storage Temperature Range (LED Chip storage only, not for Die Sheet Storage) | -40°C to +120°C |
| Recommended Die Sheet Storage Conditions | $\leq 30^\circ\text{C}$ / $\leq 85\%$ RH |
| Electrostatic Discharge Threshold (HBM) ^{Note 2} | 2000 V |
| Electrostatic Discharge Classification (MIL-STD-883K) ^{Note 2} | Class 2 |

| Typical Electrical/Optical Characteristics at $T_A = 25^\circ\text{C}$, $I_f = 80\text{ mA}$ ^{Note 3} | | | | | |
|---|------------------------------|------|------|--|--|
| Part Number | Forward Voltage (V_F , V) | | | Reverse Current [$I(V_R=7\text{ V})$, μA] Max. | Full Width Half Max (λ_D , nm) Typ. |
| | Min. | Typ. | Max. | | |
| C450SR550-Sxx00-xx | 2.7 | 2.95 | 3.2 | 1 | 18 |
| C460SR550-Sxx00-xx | 2.7 | 2.95 | 3.2 | 1 | 21 |
| C470SR550-Sxx00-xx | 2.7 | 2.95 | 3.2 | 1 | 22 |
| C527SR550-Sxx00-xx | 2.5 | 2.75 | 3.0 | 1 | 29 |



Notes:

- Maximum ratings are package-dependent. The above ratings were determined using an encapsulated SMT package for characterization. Ratings for other packages may differ. The forward currents (DC and Peak) are limited by the LED junction temperature in the package. The junction temperature should be characterized in a specific package to determine limitations. Assembly processing temperature must not exceed 325°C (< 5 seconds).
- Product resistance to electrostatic discharge (ESD) according to the HBM is performed on each die. The ESD classification is based on sample testing according to MIL-STD-883K.
- All products conform to the listed minimum and maximum specifications for electrical and optical characteristics when assembled and operated at the binning current within the maximum ratings shown above. Efficiency decreases at higher currents. Typical values given are within the range of average values expected by manufacturer in large quantities and are provided for information only. All measurements were made using an encapsulated SMT package. Optical characteristics are measured in an integrating sphere.
- Bonding Area is defined as the bond pad area exposed through the opening in the passivation layer.
- Specifications are subject to change without notice.
- Continuous reverse voltage can cause LED damage.

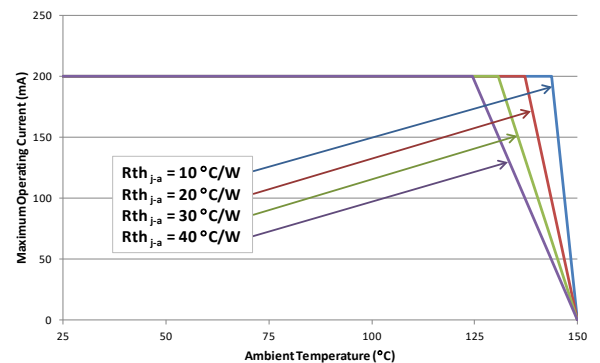



STANDARD BINS

LED chips are sorted to the Radiant Flux (RF) and Dominant Wavelength (DW) bins shown below. A sorted die sheet contains die from only one bin. Sorted die kit (CxxxSR550-Sxx00-xx) orders may be filled with any or all bins (CxxxSR550-xxxx-xx) contained in the kit. All RF and DW values are measured on bare die at $I_f = 80$ mA.

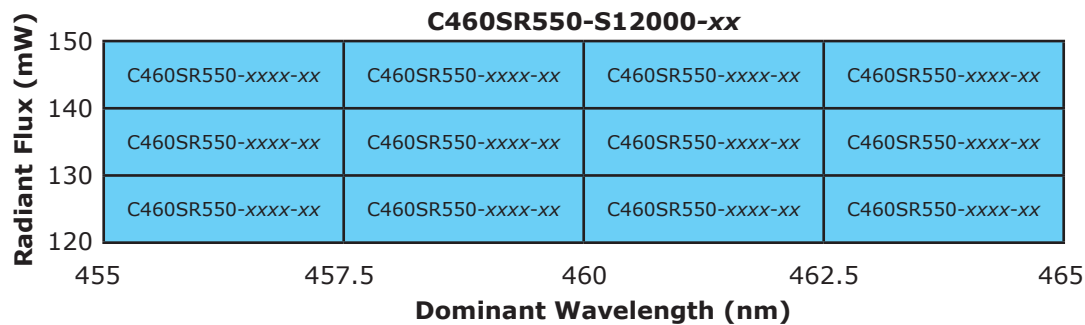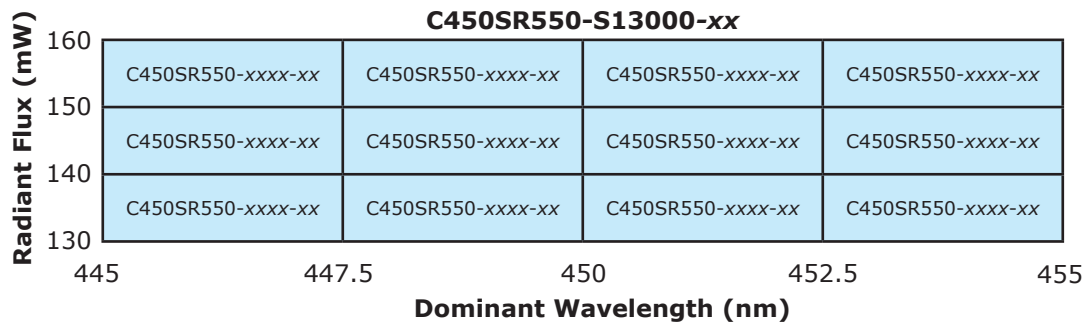







STANDARD BINS

LED chips are sorted to the Radiant Flux (RF) and Dominant Wavelength (DW) bins shown below. A sorted die sheet contains die from only one bin. Sorted die kit (CxxxSR550-Sxx00-xx) orders may be filled with any or all bins (CxxxSR550-xxxx-xx) contained in the kit. All RF and DW values are measured on bare die at $I_f = 80 \text{ mA}$.

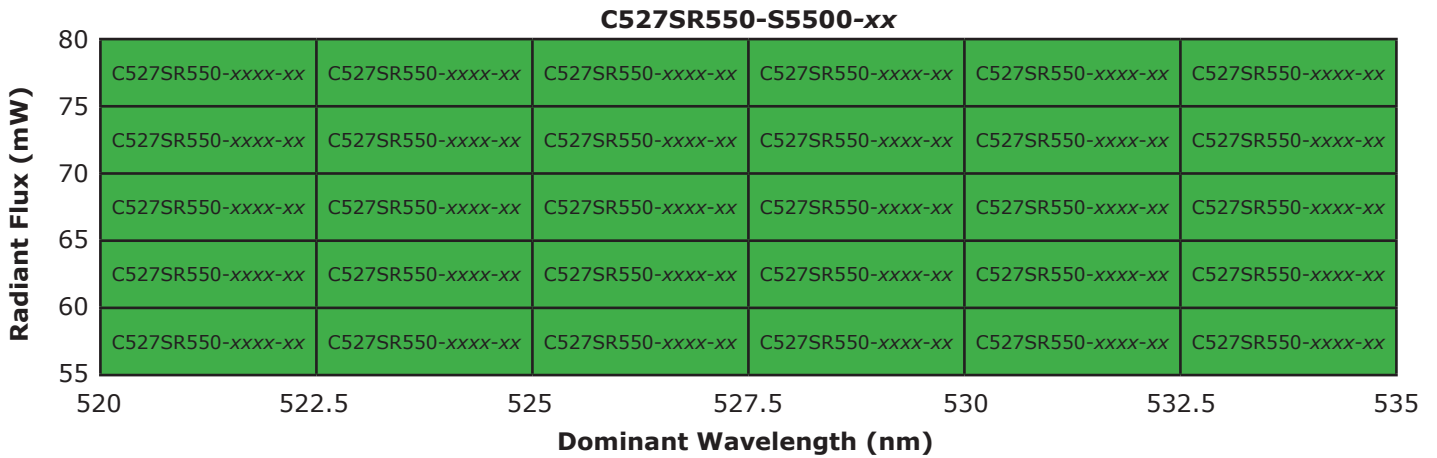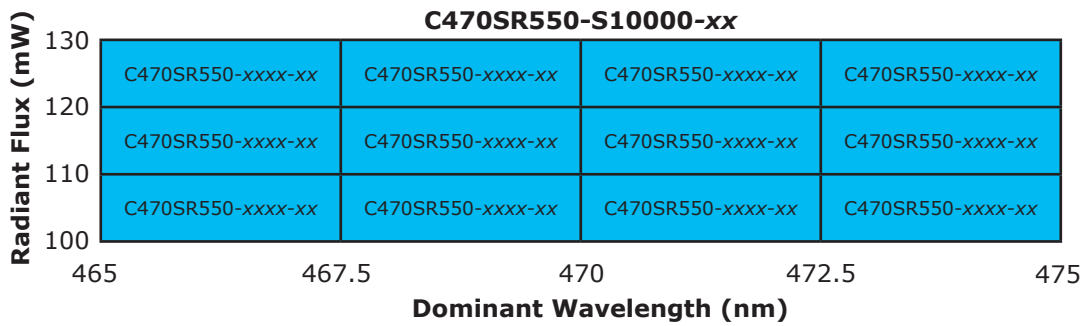


CHARACTERISTIC CURVES

These are representative measurements for the SR LED product. Actual curves will vary slightly for the various radiant flux and dominant wavelength bins.

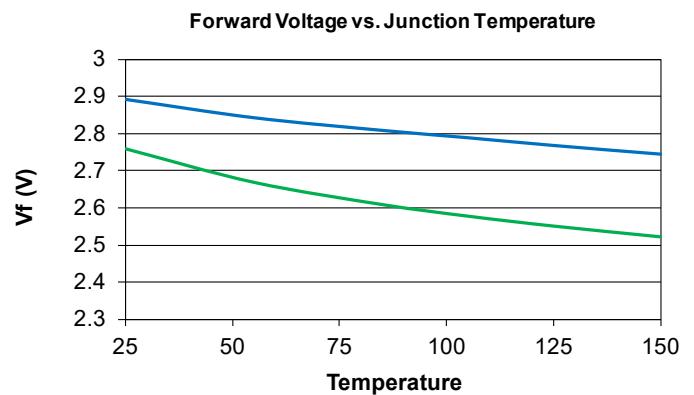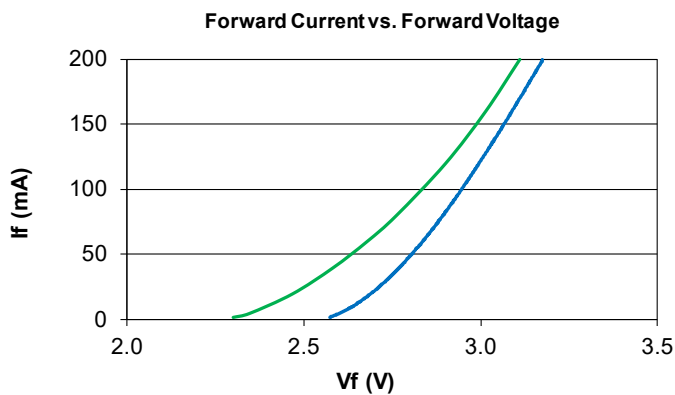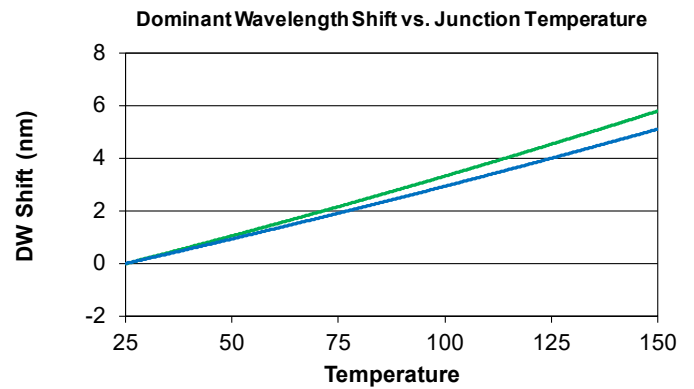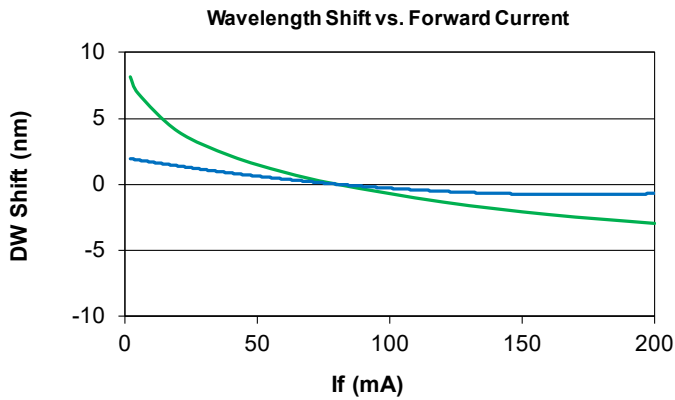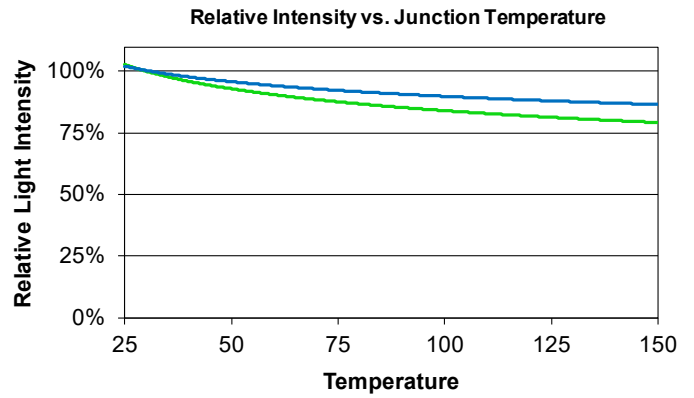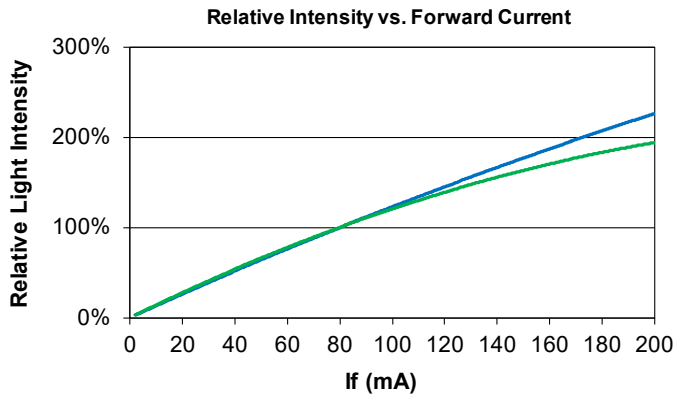

RADIATION PATTERN


This is a representative radiation pattern for the SR LED product. Actual patterns will vary slightly for each chip.

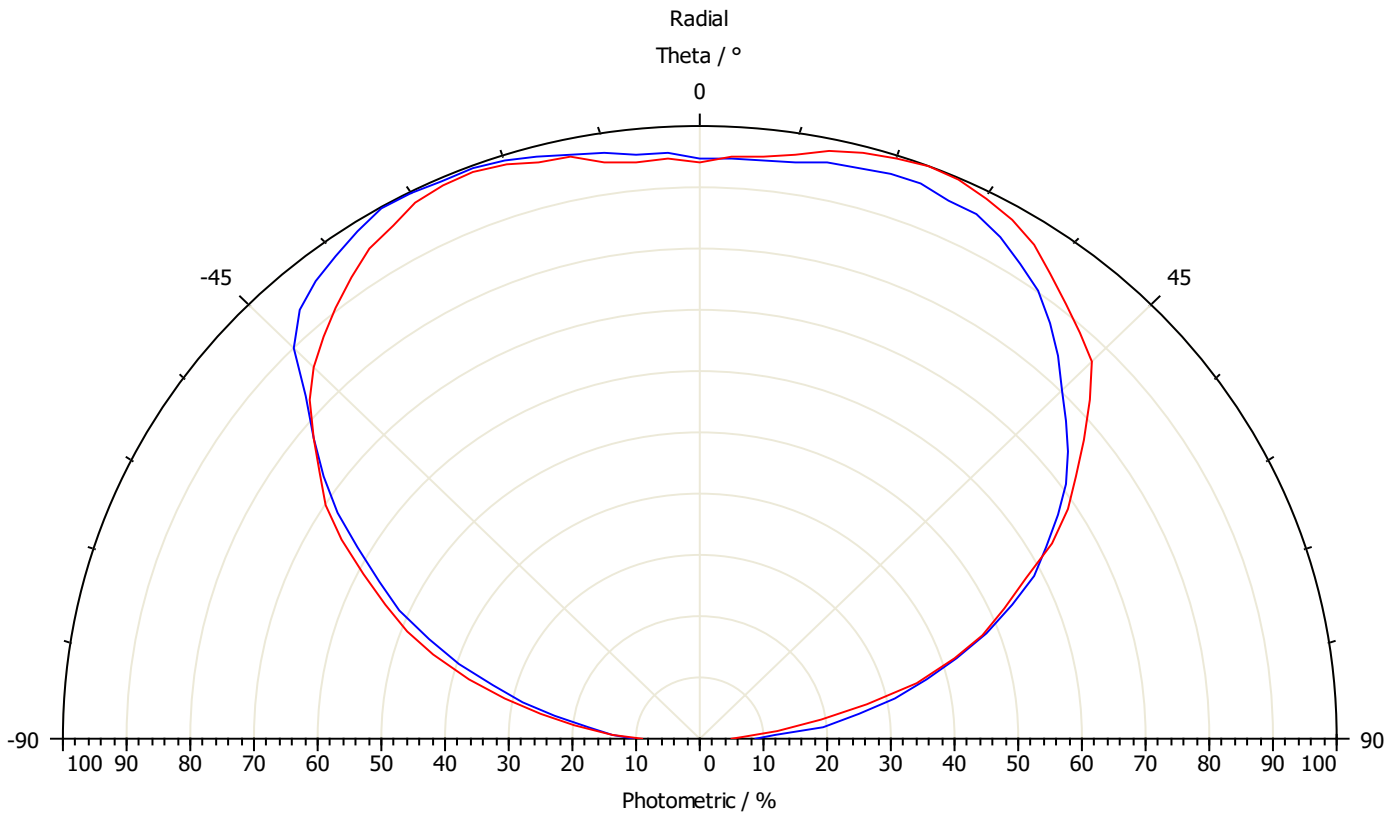

PRODUCT CONTENT INFORMATION AND WARNINGS

This information is not intended as legal advice. Consult a qualified lawyer if you are unfamiliar with the applicability of China RoHS 2 and/or California Proposition 65 to your business and products.

China RoHS 2


| | |
|---|---|
|  | <p>This green “e” logo is included on this product datasheet to indicate that the Cree LED product described herein does not include any of chemicals regulated under China RoHS 2 above permissible threshold limits. As applicable, each customer that incorporates this Cree LED product into its higher-level product needs to decide on the appropriate China RoHS 2 label for its higher-level product based on any other regulated content used in its product. If no other regulated content is present, this green “e” logo also may be used for the customer’s product.</p> |
|---|---|

Pursuant to Management Methods for Restricted Use of Hazardous Substances in Electrical and Electronic Products, an administrative order published by the Chinese Ministry of Industry and Information Technology (MIIT) and effective as of July 1, 2016 (more commonly known as “China RoHS 2”), electronic and electrical end products (EEPs) sold into China must be marked with a logo to indicate whether or not they contain any of the chemicals regulated under China RoHS 2 (i.e., lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls, or polybrominated diphenyl ethers) above the permissible threshold limits. As of March 2018, the list of EEPs includes refrigerators, air conditioners, washing machines, water heaters, printers, copiers, fax machines, TV sets, monitors, microcomputers, cell phones, and telephones. This list is subject to modification by the MIIT.

According to MIIT guidance, suppliers supporting the manufacture of EEPs (i.e., component suppliers) may—but are not required to—include a label on their component products. However, if a component product includes one of the regulated substances, the component supplier must provide the purchaser with information in a prescribed tabular format to facilitate labeling EEPs. The table must disclose the type and location of the hazardous substances contained in the component product. If a component product that could be used in an EEP is sold separately in the market, the component product falls within the scope of China RoHS unless the final purpose is known to be out of scope. A supplier that does not directly sell products in China should nevertheless comply with China RoHS 2 if there is a possibility that its products or products incorporating its products will be sold in China. For more information about China RoHS, please refer to <http://www.chinarohs.com/docs.html>.

California Proposition 65 Warnings

This Cree LED semiconductor die product (excluding packaging) does not contain any chemicals that must be disclosed under California Proposition 65 (officially titled the Safe Drinking Water and Toxic Enforcement Act of 1986, codified at Cal. Health & Saf. Code §§ 25249.5–.13) enacted by the State of California. This die product, however, is packaged using PVC die transfer film that contains Diisononyl Phthalate (DINP), a chemical known to the State of California to cause cancer and/or birth defects or other reproductive harm. If you are located in the State of California, the presence of DINP in the PVC die transfer film results in the need for you to provide an occupational warning under Proposition 65. Pursuant to California Health and Safety Code § 25606, you must post Proposition 65 compliant warnings at your place(s) of business in California to warn your employees and contractors who may come into contact with the PVC die transfer film during use and handling of the Cree LED die products, including in connection with the development or manufacture of higher-level products. Specifically, for indoor environments or outdoor spaces with clearly defined entrances, a warning sign must be posted at all public entrances to the affected area and, in no smaller than 72-point type, read substantially as follows:

| | |
|---|---|
|  | <p>WARNING: Entering this area may expose you to Diisononyl Phthalate (DINP), a chemical known to the State of California to cause cancer and birth defects or other reproductive harm. DINP is present in the PVC die transfer film on which certain semiconductor die products sold by CreeLED, Inc. or one of its affiliates are delivered. Please refer to the Cree LED website at www.cree-led.com/about/suppliers-contractors/prop-65 to verify which Cree LED semiconductor die products are delivered on this type of PVC die transfer film. For more information on California’s Proposition 65 warnings, go to www.P65Warnings.ca.gov.</p> |
|---|---|

This occupational warning must be provided in English and in any other language used on other signage in the affected area. Since the Cree LED die products themselves do not contain DINP, their incorporation into your products will not create an obligation for you to include a Proposition 65 warning on your products. Please insure ensure that the PVC die transfer film is properly handled and properly disposed of as a hazardous material after die removal.

Please refer to the Cree LED website at www.cree-led.com/about/suppliers-contractors/prop-65 to verify which Cree LED semiconductor die products are delivered on this type of PVC die transfer film.